


SPLITXT²

XT² FiberOptic Split Box

Datasheet v1.1

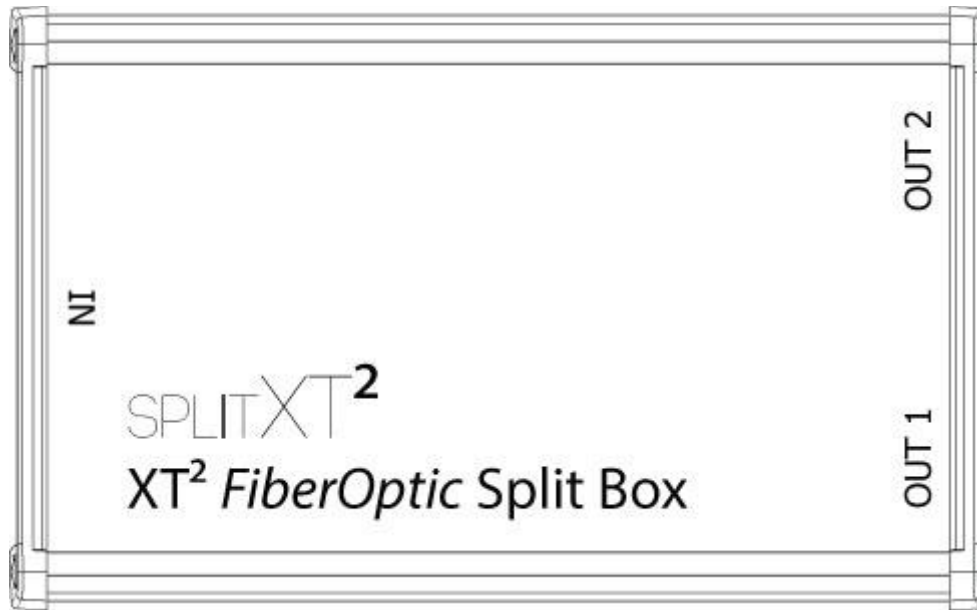

Model shown is RX unit.

Connectors:	RX Box:	1x opticalCON DUO (compatible with LC connectors) 2x opticalCON DUO (compatible with LC connectors)
	TX Box:	2x opticalCON DUO (compatible with LC connectors) 1x opticalCON DUO (compatible with LC connectors)
Wiring:		TX: IN 1 (A) + IN 2 (A) to OUT (A+B) RX: IN (A+B) to OUT 1 (B) + OUT 2 (B)
Material:		Aluminum casing with powder coating
Dimensions:		109mm (W) x 187mm (L) x 51mm (H)
Weight:		480g (per unit)
Power:		None
Operating temperature:		-10°C to 60°C
Storage temperature:		-20°C to 75°C